


Framed Flat Rooflight Measuring Guide

Dimensions must be taken from
external of upstand to $\pm 2\text{mm}$

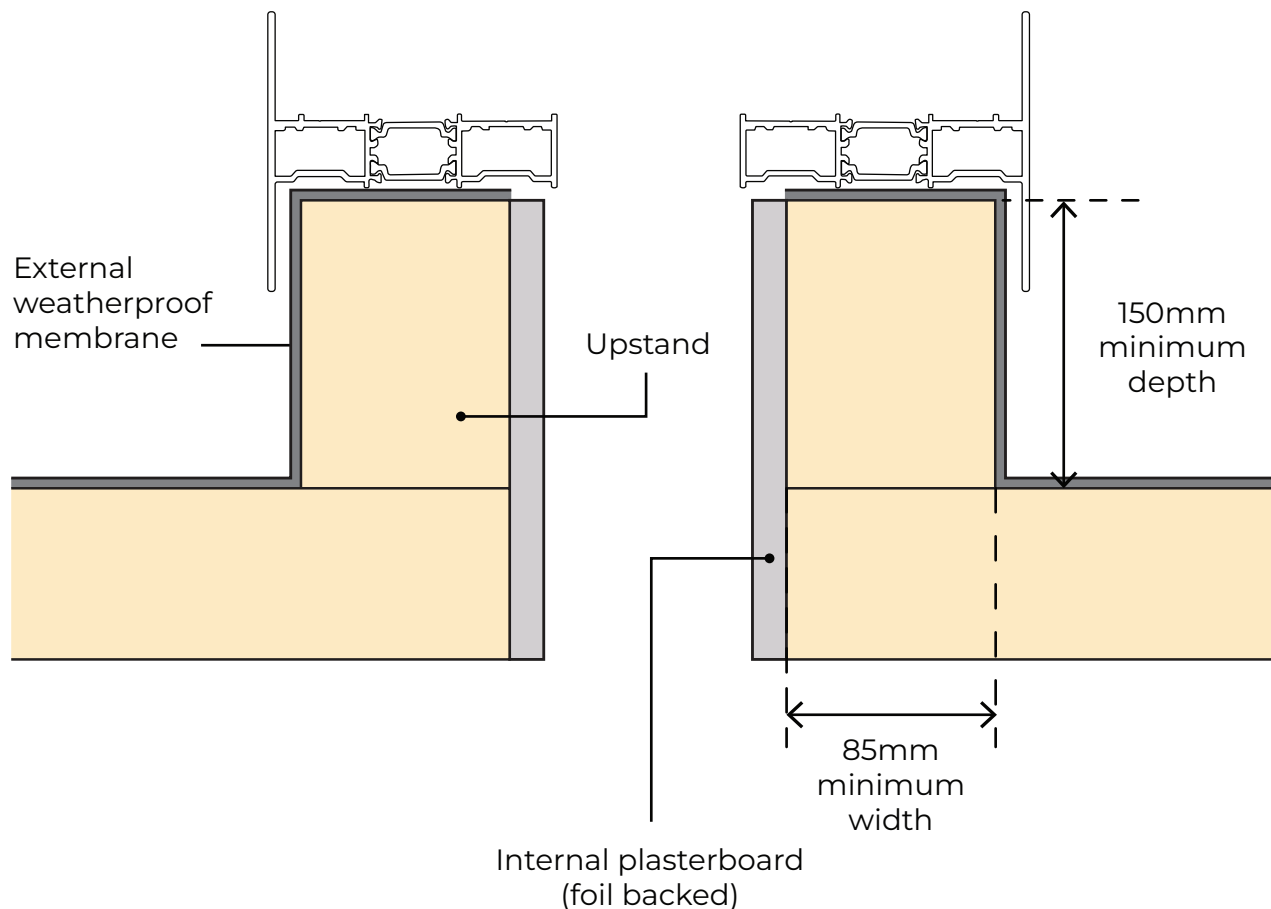

- When specifying the dimensions of your rooflight, you should provide the external dimensions of your upstand.
- Upstand must be a minimum width of 85mm wide, level and square.
- Upstand must be a minimum depth of 150mm.
- Upstand requires a minimum 5° pitch.
- It is the responsibility of the installer to determine the finishing detail of the inside.